


PSU...Ex

Intrinsically Safe Power Supply for Hazardous Products

Specifications

Operating Temperature	-10°C to 40°C (14°F to 104°F)
Power	85-265 VAC, 50/60 Hz
Enclosure Type	Stainless steel
Environmental Protection	IP65
Dimensions (in inches)	16.77" x 10.55" x 4.61"
Mounting	Desk or wall
Weight	14 lb
Number of Scales	Maximum 3 scale bases (accessory)
Approvals (output power only)	FM Class 1, II, III; Div 1, Group: A, B, C, D, E, F, G

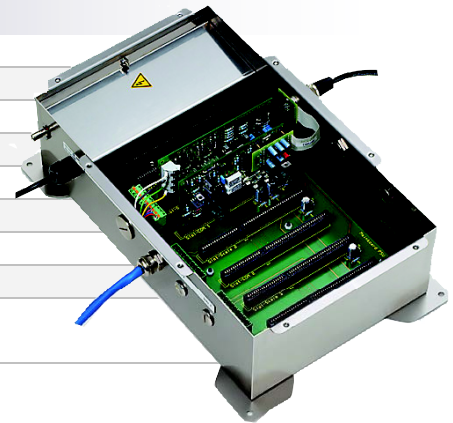

Options:

- Provides Power and Interfaces for: Viper Ex, ID7sx, K...x-T4 bases
- Scale Interfaces: TBrick Ex for K...x-T4 bases (maximum 3)
- Serial Interfaces in Non-Hazardous Area via PSU...Ex Power Supply: CL20 or RS-232 communication for printers, PC's (maximum 3 additional)
- Safe Area Power Supply: 85-265 VAC @ 50/60 Hz

Features	Benefits
Flexible	■ Provides power and interfaces for: Viper EX, ID7sx, K...x-T4
Expandable	■ Up to 3 scale bases; up to 3 com ports (CL20mA or RS232)
Universal	■ Auto-Sensing power supply unit
Connectivity Options	■ Communicate with PC's and peripherals in the safe area
Maximum Flexibility	■ Configurable to up to 3 scale platforms

Contact your local **METTLER TOLEDO** authorized distributor or sales office for more information.

Produced in a
facility that is

